



Manufacturer of furnaces and
equipment for laboratories as well
as the metal and glass industry



[For laboratories](#) > [Chamber](#)

LABORATORY CHAMBER FURNACE TYPE FCF 3,5H




www.czylok.com.pl

Type TYP	FCF3,5H
Max. temp. [°C]	1350
Chamber dimensions [mm] width x height x depth	150 x 110 x 210
Volume [dm ³]	3,5
Overall dimensions [mm] width x height x depth	530 x 795 x 500
Power [kW]	2,8
Weight [kg]	60
Supply voltage [V~]	230
Heating up time (1000°C) [min]	50

Chamber furnaces are mainly used to carry out thermal processes requiring rapid rise in temperature at a uniform temperature distribution. Furnaces have a short time to preheat, good temperature uniformity in the chamber and a long service life of heating elements. It is possible to equip the furnace with a temperature programmer type M or temperature regulator type P.

TEMPERATURE PROGRAMMER TYPE M

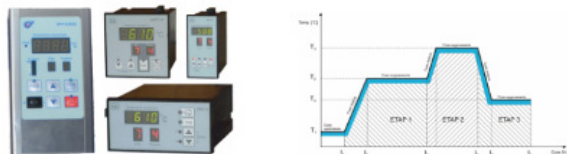


One four-and two single displays allow easy reading of the actual temperature of the object and set parameters. With the ability to program a delayed start time as well as the holding time, ie. to maintain furnace temperature for a certain time, it is possible to automatically carry out a series of burnings unattended. This gives you the opportunity to work eg. during the night tariff for electricity or to heat-up the furnace to the required temperature ahead of time, avoiding unnecessary downtime. Has the ability to program the time (ie. speed) to reach the desired temperature. Characterized by a programmable 10 stages in each program of work, where the stage corresponds to the set temperature, the time to come to the temperature and time of annealing temperature setpoint. This enables the formation of burning curve for any given furnace with varying lengths of growth or fall of temperature over time.

TEMPERATURE REGULATOR TYPE P



Two four character displays allow easy reading of the actual temperature of the object and set parameters. With the ability to program a delayed start time as well as the holding time, ie. to maintain furnace temperature for a certain time, it is possible to automatically carry out a series of burnings unattended. This gives you the opportunity to work eg. during the night tariff for electricity or to heat-up the furnace to the required temperature ahead of time, avoiding unnecessary downtime.

List of additional equipment:



Additional portable temperature measurement system



Basket for four crucibles and the basket handle. Baffle dimensions 30x30 mm, 25 mm depth; overall dimensions 90x80 mm, height 80 mm.




Catalyst excerpt



Ceramic shelf for the furnace chamber. Parts furnace chamber at half height. Available for FCF 12 and FCF 22.




Chamber calibration. PCA accredited laboratory.



Computer program for visualization's recording and archiving time-temperature parameters of furnace operation.



Computer set with a software



Connection of the protective gas supply. Installed on the door of the furnace, outer diameter 6mm.



Excerpt with a fan



Furnace stand with shelf



Heat resistant gloves



Heat-resistant steel cuvette. The maximum use temperature up to 1100° C.



Laboratory tongs



Measurement calibration. PCA accredited laboratory.



Retort inset for muffle furnaces. Available for FCF 12S and FCF 22S. The maximum use temperature up to 1100° C.



Screen Recorder KD8. Touch screen 5.7", archiving data on the card up to 4 GB, 6 measurement inputs, visualization



Sight glass installed in the door of the furnace. Diameter 20 mm.



Sound signaling completion of the program



Stand for six crucibles. 30mm hole diameter, 28mm depth, stand equipped with a handle base. The maximum use temperature up to 1100° C.



Stand with canopy fitted to the outer dimensions of the furnace equipped with an exhaust fan and a lower shelf.



Steel tray adapted to the dimensions of the furnace with a handle. The maximum use temperature up to 1100° C.




Steel tray with holes, stand and tray holder. Adapted to the dimensions of the furnace. The maximum use temperature up to 1100° C.



Temperature sensor calibration. PCA accredited laboratory.



Thermocouple connector (installed in the door of the furnace, acid-proof frame, max diameter 11mm).



Viewfinder provided with input from quartz glass. Diameter 25 mm.

If you have any questions please contact us:

tel. 32 47 07 495

tel./fax 32 47 07 502

e-mail: czylok@czylok.com.pl